


INSP-1

Inspection Fixture Option for the TWIN-CAT-2 Rewinder/Unwinder

- *Allows manual or scanner inspection*
- *Optional Preset Counter available*

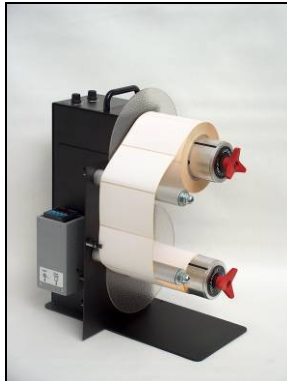

INSP-1+PC-1 installed on the TWIN-CAT-2



INSP-1 Inspection Fixture Bracket Assembly with optional PC-1 Preset Counter

Remove all parts from the shipping container and verify contents

Package Contents

- *User Manual (this document)*
- *INSP-1 Inspection Fixture*
- *2 Wing Bolts*
- *Optional PC-1 Preset Counter*

• KEEP MANUAL IN A SAFE PLACE FOR FUTURE REFERENCE •

SET-UP:

1. Mount the Inspection Fixture Mounting Bracket to the side of the TWIN-CAT-2 Rewinder/Unwinder using the supplied Wing Bolts.
 - a. The Bracket goes flat up against the side of the TWIN-CAT-2 Chassis.
 - b. Place a Nylon Washer onto each Wing Bolt before pushing them through the Mounting Bracket.
IMPORTANT: DO NOT PUT WASHERS BETWEEN THE BRACKET AND THE CHASSIS.
 - c. Start the Wing Bolts into the threaded Holes on the side of the TWIN-CAT-2 Chassis. Do not tighten.
2. Slide the Mounting Bracket forward or back to the desired position and tighten the Wing Bolts snugly.
3. Thread the labels over the Label Rollers and onto the Rewind Label Cores as shown on the above picture.
4. Be sure to use the **INSP-1** with Label Cores on the TWIN-CAT-2 Rewinder/Unwinder.
5. Avoid excessive Torque settings as high tension can cause labels to mistrack.

MAINTENANCE:

Your INSP-1 requires no maintenance.

LABELMATE LLC

69 AVENUE ALPHONSE XIII, 1180 BRUSSELS, BELGIUM
TEL: +322.375.69.60 – FAX: +322.375.38.96
brussels@labelmate.com

www.labelmate.com